

TOKU PNEUMATIC TOOL MFG.CO.,LTD.

Head Office · Head Plant
No.5733 Minobaru, Miyaki-Machi,
Miyaki-Gun, Saga-ken, Japan
Phone: 0942-94-3166
Fax: 0942-94-3169



Main Plant



Kamimine Plant



Kishima Plant



Hirokawa Plant



Yamada Main Plant

TOKU PNEUMATIC CO.,LTD.

International Operations
3-4, 4Chome, Katakasu, Hakata-ku,
Fukuoka, Japan
Phone: 092-431-0401
Fax: 092-431-1014
e-mail: int-op@toku-net.co.jp
URL: <http://www.toku-net.co.jp/en/>

Distributor

Ver 3.01



Angle Grinders

Needle Scalers

Impact Wrenches

Drills

Hammers


TOKU PNEUMATIC CO.,LTD.

CONTENTS

• Impact Drivers	2
• Drivers	2
• Ratchets Wrenches	2
• Impact Wrenches 3/8"~3/4"	3-4
• Impact Wrenches 1"~1/2"	5-6
• Angle Grinders and Straight Grinders	7-8
• Die Grinders	9
• Drills	10
• Scaling Hammers	11
• Needle Scalars	11
• Hammers	12
• Flux Chippers	12
• Sanders	13-14

Impact Wrenches

■ Working Torque Range
● Ultimate Torque

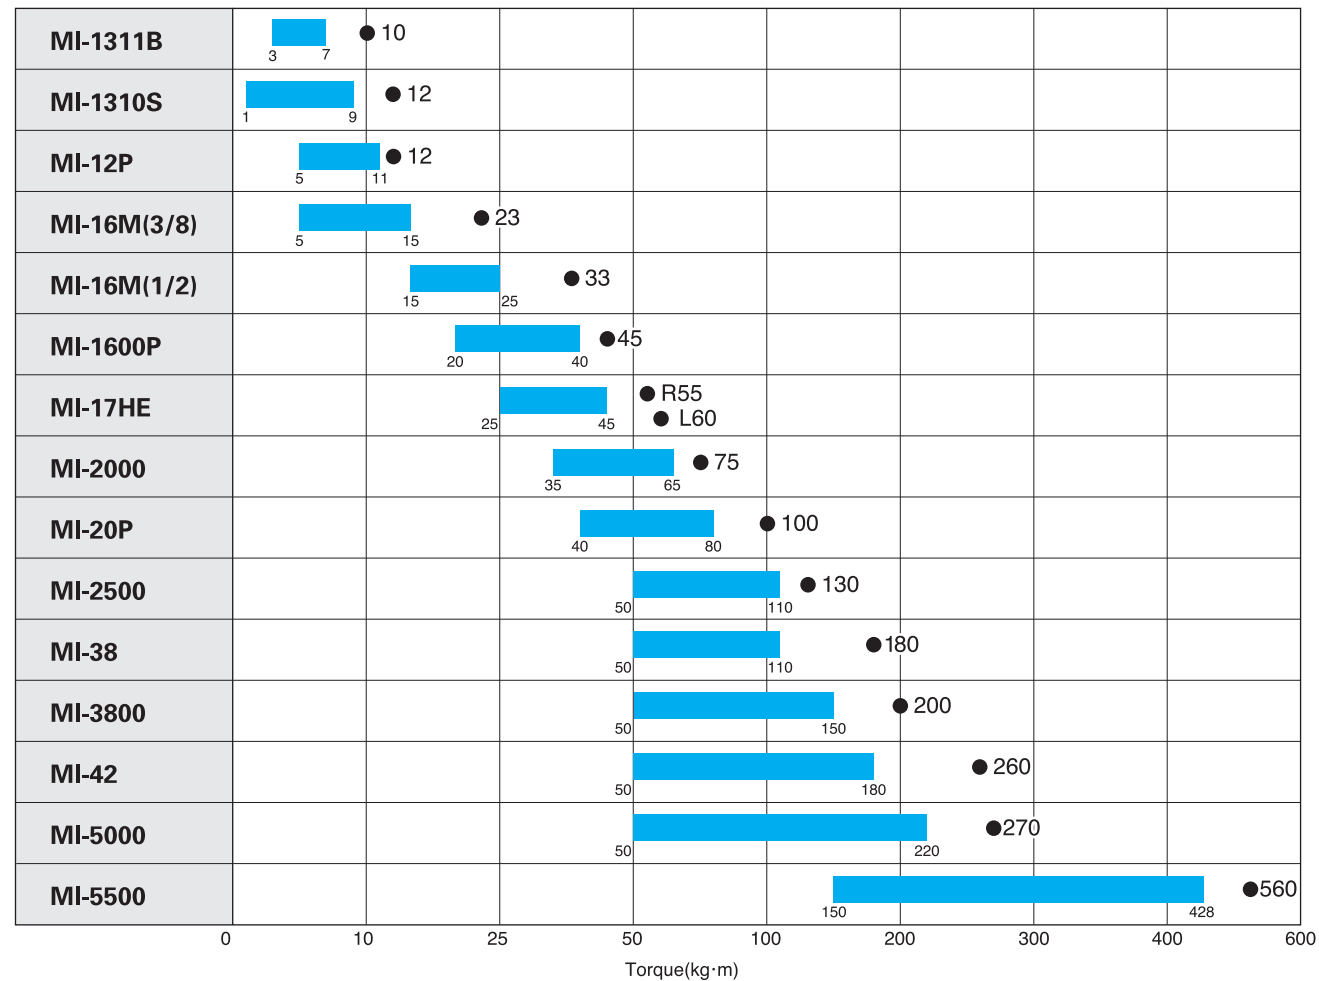


Impact Drivers



Features

- 2 hammer(Pin-less)clutch
- 2 steps throttle for precise control
- 360 free rotating handle exhaust
- Well balanced Ergonomic design
- One handed easy reverse switch
- Ideal for wood work and assembly work
- 3/8 SQ.drive model available(MID-8P(R) 3/8SQ)

MID-8P 1/4"Hex

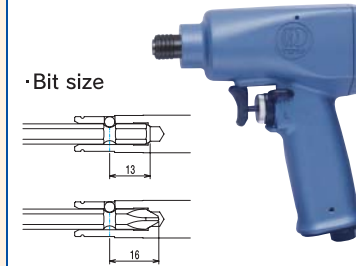

Features

- Twin hammer clutch
- Tease throttle for precise control
- Handle Exhaust directs air away from an operator
- Well balanced Ergonomic design
- 4 Positions regulator
- Elastomer handle grip
- 3/8 SQ.drive model available (MID-12P 3/8SQ)
- Ideal for wood work and assembly work

MI-12D 1/4"Hex



Features

- Straight type impact driver.
- Ideal for motor vehicle and light assembly work

MID-50 1/4"Hex



Features

- Ideal for motor vehicle and light assembly work

MID-60 1/4"Hex


Drivers



Features

- Ideal for appliance,electronics and other light assembly industries

MV-6216 1/4"Hex

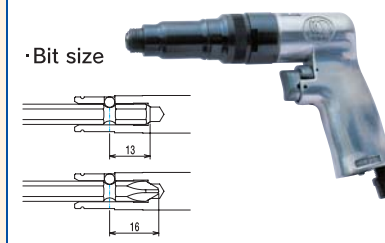

Features

- Ideal for furniture,wood working, motor vehicle and other assembly operations

MV-6226 1/4"Hex

Ratchet Wrenches



Features

- Compact and powerful
- Rubber covered ratchet head
- Durable ratchet head (heat treated) prevents slipping
- Ideal for confined working conditions

MR-2207C 1/4"SQ
MR-2209C 3/8"SQ



Features

- Easy grip handle Quick run down capacity
- Ideal for usage on pumps, radiators, small engines exhaust systems etc.

MR-2310B 3/8"SQ
MR-2410B 1/2"SQ

Impact Drivers Specifications: Air pressure 6kg/cm2

MODEL	Drive (in)	Bolt Size (mm)	Net Weight (kg)	Overall Length (mm)	Center Height (mm)	Free Speed (rpm)	Air Cons		Air Inlet (PT)	Hose Size (in)
							Free (m³/min)	Load (m³/min)		
MID-8P	H 1/4	8	1.0	154	22.5	10500	0.55	0.4	1/4	1/4
MI-12D	H 1/4	12	1.2	154	25.3	9500	0.50	0.4	1/4	1/4
MID-50	1/4	6	0.6	162	60	12000	0.37	0.26	1/4	3/8
MID-60	1/4	6	0.8	181	55	10800	0.48	0.32	1/4	3/8

Drivers and Ratchet Wrenches Specifications: Air pressure 6kg/cm2

MODEL	Drive (in)	Bolt Size (mm)	Torque Range (kg · m)	Net Weight (kg)	Overall Length (mm)	Free Speed (rpm)	Air Cons (m³/min)	Air Inlet (PT)	Hose Size (in)
MV-6216	H1/4	6	0.4-0.9	1.2	250	1800	0.42	1/4	1/4
MV-6226	H1/4	6	0.5-1.2	1.3	205	1800	0.6	1/4	1/4
MR-2207C	1/4	8	0.6-2.8	0.53	165	250	0.35	1/4	1/4
MR-2209C	3/8	8	0.6-2.8	0.53	165	250	0.35	1/4	1/4
MR-2310B	3/8	10	1.4-7.0	1.13	254	180	0.45	1/4	1/4
MR-2410B	1/2	10	1.4-7.0	1.13	254	180	0.45	1/4	1/4


3/8" SQ



Features

Twin Hammer

- Compact and light Weight
- One handed easy reverse switch 1/2"SQ drive model available
- Ideal for general repair and assembly work in the 3/8" range
- Tease throttle for precise control
- Handle Exhaust directs air away from the operator
- Well balanced Ergonomic design
- 4 positions regulator




for 3/8"SQ for 1/2"SQ
MI-12P 3/8"SQ
 1/2"SQ also available



Features

One Hammer

- Front Exhaust
- 4 Positions regulator
- Ideal for general repair in the 3/8" range




MI-1311B 3/8"SQ



Features

One Hammer

- Forward & reverse rotation is available with one hand
- Compact & light
- 360° air inlet swivel



MI-1310S 3/8"SQ


1/2" SQ



Features

One Hammer

- Ideal for car repair and assembly work
- 360° adjustable silencer
- Durable steel housing




MI-1600 1/2"



Features

Twin Hammer

- Elastomer handle grip
- Ideal for car repair and assembly work




for 3/8"SQ for 1/2"SQ
MI-16M 1/2"SQ



Features

Twin Hammer

- Ultimate power in reverse
- Ideal for car repair and tire shops
- Long Anvil (+50.8) available (MI-17HEL)



MI-17HE 1/2"SQ


3/4" SQ



Features

Twin Hammer

- 360 free rotating exhaust
- One handed easy reverse switch
- Ideal for assembly and maintenance of trucks
- Anvil type: RH type available
- Long Anvil (+120) available (MI-20PL)




MI-20P 3/4"SQ



Features

One Hammer

- 360 free rotating exhaust
- Front Exhaust type available
- 4 Positions regulator
- Ideal for general repair and assembly work




MI-2000P 3/4"SQ



Features

One Hammer

- Long anvil shank type MI-2000GL available
- Ideal for car repair and assembly work



MI-2000GS 3/4"SQ




Inside trigger



Features

One Hammer

- Anvil type: RH type available
- 3/4"SQ drive model available
- Ideal for assembly and maintenance of trucks
- Well balanced Ergonomic design
- 2 Steps throttle for precise control
- 4 positions regulator
- 360 free rotating exhaust
- Elastomer side handle grip



MI-2500P 3/4"SQ



Features

One Hammer

- Short anvil shank type MI-2500GS available
- Ideal for assembly and maintenance of trucks
- 2 Steps throttle for precise control
- Elastomer side handle grip
- 4 positions regulator



Inside trigger

MI-2500GL 3/4"SQ

Impact Wrench Specifications: Air pressure 6kg/cm²

MODEL	Drive (in)	Bolt Size (mm)	Torque Range (kg·m)	Max Torque (kg·m)	Net Weight (kg)	Overall Length (mm)	Center Height (mm)	Free Speed (rpm)	Air Cons		Air Inlet (PT)	Hose Size (in)
									Free (m ³ /min)	Load (m ³ /min)		
MI-12P	3/8	12	5-11	12	1.2	150	25.3	9500	0.5	0.4	1/4	3/8
MI-16M	3/8	13	5-15	23	1.5	170	27.5	7200	0.62	0.4	1/4	3/8
MI-1311B	3/8	10	3-7	10	1.3	150	24	7000	0.45	0.35	1/4	1/4
MI-1310S	3/8	10	1-9	12	0.91	177	30	12500	0.4	0.3	1/4	3/8
MI-1600P	1/2	16	20-40	45	2.6	180	32.5	6500	0.74	0.5	1/4	3/8
MI-16M	1/2	16	15-25	33	1.5	170	27.5	7200	0.62	0.4	1/4	3/8
MI-17HE	1/2	16	25-45	R55 L60	2.5	179	33	5500	0.6	0.5	1/4	3/8

Impact Wrench Specifications: Air pressure 6kg/cm²

MODEL	Drive (in)	Bolt Size (mm)	Torque Range (kg·m)	Max Torque (kg·m)	Net Weight (kg)	Overall Length (mm)	Center Height (mm)	Free Speed (rpm)	Air Cons		Air Inlet (PT)	Hose Size (in)
									Free (m ³ /min)	Load (m ³ /min)		
MI-20P	3/4	22	40-80	100	3.9	220	41.7	5000	1.1	0.7	3/8	3/8
MI-2000P	3/4	20	35-65	75	4.4	224	42	5500	1.1	0.7	3/8	3/8
MI-2000GS(ES)	3/4	20	35-65	75	5.2	309	42	5500	1.1	0.7	3/8	3/8
MI-2000GL(EL)	3/4	20	35-65	75	5.6	420	42	5500	1.1	0.7	3/8	3/8
MI-2500P	3/4	25	50-110	130	8.2	265	50	5300	1.2	0.7	3/8	1/2
MI-2500GS(ES)	3/4	25	50-110	130	8.2	341	50	5300	1.2	0.7	3/8	1/2
MI-2500GL	3/4	25	50-110	130	8.2	341	50	5300	1.2	0.7	3/8	1/2

1" SQ

MI-2500P 1" SQ

Features One Hammer

- Anvil type: RH type available
- 3/4" SQ drive model available
- Ideal for assembly and maintenance of trucks
- Well balanced Ergonomic design
- 2 Steps throttle for precise control
- 4 positions regulator
- 360 free rotating exhaust

MI-2500GL 1" SQ

Features One Hammer

- Short anvil shank type MI-2500GS available
- Ideal for assembly and maintenance of trucks
- 2 Steps throttle for precise control
- Elastomer side handle grip
- 4 positions regulator

MI-3800P 1" SQ

Features One Hammer

- Anvil type: RH type available
- Ideal for maintenance of trucks and construction equipments
- Well balanced Ergonomic design
- 2 Steps throttle for precise control
- 4 positions regulator
- 360 free rotating exhaust
- Elastomer side handle grip

MI-3800GL 1" SQ

Features One Hammer

- Short anvil shank type MI3800GS available
- Ideal for maintenance of trucks and truck tires
- 2 Steps throttle for precise control
- Elastomer side handle grip
- 4 Positions regulator

MI-38GL 1" SQ

MI-42GL 1" SQ

Features Twin Hammer

- Anvil type: RH type available
- Short anvil shank type MI-38GS·MI-42GS available
- Ideal for truck tires
- Ideal for truck tires and heavy equipments
- Elastomer side handle grip
- 4 positions regulator
- Powerful and Light Weight
- Durable Clutch parts for long life
- 2 Steps throttle for precise control

Impact Wrench Specifications; Air pressure 6kg/cm²

MODEL	Drive (in)	Bolt Size (mm)	Torque Range (kg · m)	Max Torque (kg · m)	Net Weight (kg)	Overall Length (mm)	Center Height (mm)	Free Speed (rpm)	Air Cons		Air Inlet (PT)	Hose Size (in)
									Free (m ³ /min)	Load (m ³ /min)		
MI-2500P	1	25	50-110	130	8.2	265	50	5300	1.2	0.7	3/8	1/2
MI-2500GS(ES)	1	25	50-110	130	8.2	341	50	5300	1.2	0.7	3/8	1/2
MI-2500GL(EL)	1	25	50-110	130	9.0	460	50	5300	1.2	0.7	3/8	1/2
MI-3800P	1	38	50-150	200	9.5	276	55	4700	1.6	1.0	1/2	1/2
MI-3800GS(ES)	1	38	50-150	200	9.5	355	55	4700	1.6	1.0	1/2	1/2
MI-3800GL(GL)	1	38	50-150	200	10.2	504	55	4700	1.6	1.0	1/2	1/2
MI-38GS(ES)	1	38	50-110	180	7.2	339	49	3700	1.2	0.7	1/2	1/2
MI-38GL(EL)	1	38	50-110	180	7.9	498	49	3700	1.2	0.7	1/2	1/2
MI-42GS(ES)	1	42	50-180	260	10.2	370	55	3900	1.9	1.0	1/2	1/2
MI-42GL(EL)	1	42	50-180	260	10.6	519	55	3900	1.9	1.0	1/2	1/2

1" SQ & 1-1/2" SQ

MI-5000GL 1" SQ

Features One Hammer

- Short anvil shank type MI-5000GS available
- Ideal for truck tires and heavy equipments

MI-5000P 1" SQ

Features One Hammer

- Anvil type: RH type available
- Ideal for maintenance of trucks and construction equipments

MI-5500 1-1/2" SQ

Features Pin Hammer

- Pin clutch mechanism
- Powerful for extra heavy duty work

Impact Wrench Specifications; Air pressure 6kg/cm²

MODEL	Drive (in)	Bolt Size (mm)	Torque Range (kg · m)	Max Torque (kg · m)	Net Weight (kg)	Overall Length (mm)	Center Height (mm)	Free Speed (rpm)	Air Cons		Air Inlet (PT)	Hose Size (in)
									Free (m ³ /min)	Load (m ³ /min)		
MI-5000P	1	50	50-220	270	13.9	310	60	3700	1.9	1.0	1/2	1/2
MI-5000GS(ES)	1	50	50-220	270	14.3	460	60	3700	1.9	1.0	1/2	1/2
MI-5000GL(EL)	1	50	50-220	270	16.0	594	60	3700	1.9	1.0	1/2	1/2
MI-5500	1-1/2	55	150-428	560	18.1	520	60	2800	0.9	1.25	1/2	1/2

Toku One hammer clutch Features

Simplified structure for high durability and easy maintenance
Precised machined clutch provides excellent performance and less vibration.

Toku Twin hammer clutch Features

Toku twin hammer provides maximum performance, balanced impacts and power output
Less wasted energy and simplified maintenance
Cold forged hammer for high durability

Angle Grinders(GOVERNED)

TAG-20FR



TAG-20FL



TAG-40FRH



TAG-40FLH




Features

- Compact and light
- Ideal for removing burrs on the material and smoothing welds


TAG-40/50MR



Female type



Male type



Features

- Ideal for removing burrs on the material and smoothing welds

Angle Grinders(GOVERNED)

- Turn throttle type : 2"/4"/5"/7" model available
- Lever throttle type : 2"/4"/7"/9" model available
- Safety lock off throttle • 360 free rotating exhaust for 7"&9"



TAG-700
Turn throttle type



TAG-700QJL/900QJL
Lever throttle type

Features

- Ideal for heavy duty work such as smoothing welds and cutting material

Straight Grinders(GOVERNED)



TSG-6L
Lever throttle type
Safety Lock-off throttle

Features

- Ideal for various types of finishing tasks



TSG-3F/5S/6S
Turn throttle type

Angle Grinders Specifications; Air pressure 6kg/cm²

MODEL	Wheel Size (mm)	Wheel Max Speed (m/min)	Free Speed (rpm)	Net Weight (kg)	Overall Length (mm)	Maximum Air Cons (m ³ /min)	Air Inlet (PT)	Hose Size (in)	Horse Power
TAG-20FR	58×9.5×3	4300	22000	0.51	138	0.4	1/4	3/8	0.3
TAG-20FL	58×9.5×3	4300	22000	0.53	138	0.4	1/4	3/8	0.3
TAG-20CL	58×9.5×3	4300	22000	0.5	138	0.4	1/4	3/8	0.3
TAG-40MR	100×6×16	4300	13000	1.4	195	1.00	1/4	3/8	0.9
TAG-40FR	100×6×16	4300	13000	1.4	195	1.00	1/4	3/8	0.9
TAG-40FRH	100×6×16	4300	13000	1.8	217.5	1.00	1/4	3/8	0.9
TAG-40FLH	100×6×16	4300	13000	1.6	213.5	1.00	1/4	3/8	0.9
TAG-50MR	125×6×22	4300	10300	1.4	195	1.00	1/4	3/8	0.9

Angle Grinders/Straight Grinders Specifications; Air pressure 6kg/cm²

MODEL	Wheel Size (mm)	Wheel Max Speed (m/min)	Free Speed (rpm)	Net Weight (kg)	Overall Length (mm)	Air Cons (m ³ /min)	Air Inlet (PT)	Hose Size (in)	Horse Power
TAG-700	180×8×22	4300	7500	3.1	274	0.8-1.0	3/8	1/2	1.3
TAG-700QJL	180×8×22	4800	8400	3.1	304	1.0-1.3	3/8	1/2	1.3
TAG-900QJL	230×8×22	4800	6500	3.4	304	0.7-1.0	3/8	1/2	1.3
TSG-3F	75×13×9.5	3000	12700	1.6	305	0.8	1/4	3/8	0.7
TSG-5S	125×19×12.7	3000	7600	3	400	1.1	3/8	1/2	1.4
TSG-6S	150×25×15.9	3000	6300	4.2	430	1.2	3/8	1/2	2.1
TSG-6L	150×25×15.9	3000	6000	4.2	430	1.2	3/8	1/2	2.1

6mm Grinders	
 <p>MG-7206B</p> <p>Features</p> <ul style="list-style-type: none"> • Rear exhaust • 1/4" Collet chuck (Option) 	 <p>MG-20</p> <p>Features</p> <ul style="list-style-type: none"> • Front exhaust • 1/4" Collet chuck (Option)
 <p>MG-7236B 6mm Angle</p> <p>Features</p> <ul style="list-style-type: none"> • Compact, light and handy • 90° angle head allows flexibility in tight spots • 1/4" Collet chuck (Option) 	 <p>MG-7204B 6mm Mini</p> <p>Features</p> <ul style="list-style-type: none"> • Compact, light and handy • Front exhaust • 1/4" Collet chuck (Option)
 <p>TG-25Z II</p> <p>Features</p> <ul style="list-style-type: none"> • Turn throttle • Front exhaust 	 <p>MG-1B</p> <p>Features</p> <ul style="list-style-type: none"> • Compact and light weight • Front exhaust
 <p>TG-38Z</p> <p>Features</p> <ul style="list-style-type: none"> • Turn throttle • Front exhaust • 1/4" Collet chuck (Option) 	 <p>TSG-3C 6mm Straight Grinders</p> <p>Features</p> <ul style="list-style-type: none"> • 3"grindstone is available(wheel Cover necessary)

6mm Grinders Specifications: Air pressure 6kg/cm²

MODEL	Collet Size (mm)	Net Weight (kg)	Overall Length (mm)	Free Speed (rpm)	Air Cons. Free (m ³ /min)	Air Inlet (PT)	Hose Size (in)
MG-7206B	6	0.6	146	22,000	0.5	1/4	3/8
MG-20	6	0.6	139	22,000	0.6	1/4	3/8
MG-7236B	6	0.4	123	18,000	0.38	1/4	3/8
MG-7204B	6	0.4	120	25,000	0.38	1/4	3/8
TG-25Z-II	6	0.56	150	18,000	0.5	1/4	3/8
TG-38Z	6	0.7	178	23,000	0.45	1/4	3/8
MG-1B	6	0.6	157	20,000	0.4	1/4	3/8

6mm Straight Grinders Specifications: Air pressure 6kg/cm²

MODEL	Wheel Size (mm)	Wheel Max Speed (m/min)	Free Speed (rpm)	Net Weight (kg)	Overall Length (mm)	Air Cons. Free (m ³ /min)	Air Inlet (PT)	Hose Size (in)	Horse Power
TSG-3C	75×13×9.5	3000	12700	1.6	340	0.8	1/4	3/8	0.7

Drills	
 <p>MD-10L 3/8"</p> <p>Features</p> <ul style="list-style-type: none"> • Industrial tool for professionals • Tease throttle for precise control • Planetary gear enables smooth operation and long life • Handle exhaust 	 <p>MD-3310B 3/8"</p> <p>Features</p> <ul style="list-style-type: none"> • Reliable general purpose drill • Handle exhaust
 <p>MD-3311B 3/8" Reversible</p> <p>Features</p> <ul style="list-style-type: none"> • Triple planetary gear system provides smooth operation • Grip reverse valve enables one handed directional changes • 1/2 HP air motor provides max power • Handle exhaust 	 <p>MD-3413B 1/2" Reversible</p> <p>Features</p> <ul style="list-style-type: none"> • Side support handle for good control • Grip reverse valve enables one handed directional changes • 1/2 HP air motor with a double reduction gear system produces reliable power • Ideal for drilling, screw driving,reaming, cylinder honing
 <p>MD-3312B 3/8" Angle Reversible</p> <p>Features</p> <ul style="list-style-type: none"> • Compact and light design • Tease throttle for precise control • Ideal for tapping work • Rear exhaust 	

Drills Specifications: Air pressure 6kg/cm²


MODEL	Chuck Size (in)	Spindle Size (in)	Net Weight (kg)	Overall Length (mm)	Free Speed (rpm)	Air Cons. Free (m ³ /min)	Air Inlet (PT)	Hose Size (in)
MD-10L	3/8	3/8X24UNF	0.9	130	2300	0.5	1/4	1/4
MD-3310B	3/8	3/8X24UNF	1.0	165	2400	0.47	1/4	1/4
MD-3311B	3/8	3/8X24UNF	1.1	200	2000	0.58	1/4	1/4
MD-3312B	3/8	3/8X24UNF	1.2	208	1200	0.36	1/4	1/4
MD-3413B	1/2	3/8X24UNF	1.6	220	500	0.47	1/4	1/4

Scaling hammers



- Features**
- Hardened pistons and cylinders for longer life
 - Simple structure for easy maintenance

TS-2

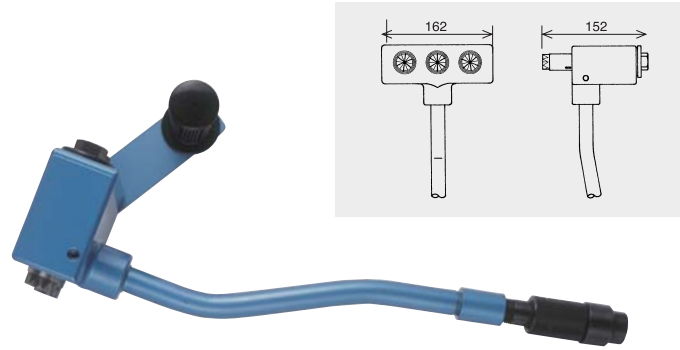

- Features**
- 3 Head Scaler
 - Powerful

TS-3H

Standard Tungsten Carbide Tipped Piston available



Needle scalars



- Features**
- Compact and handy needle scalars
 - Precision heat-treated needles for maximum performance

N-200



TNS-200



TNS-200PS



TN-300H

Scaling hammers Specifications; Air pressure 6kg/cm²

MODEL	Piston Dia (mm)	Piston Stroke (mm)	Net Weight (kg)	Blow per Min (bpm)	Overall Length (mm)	Air Cons. Free (m ³ /min)	Air Inlet (PT)	Hose Size (in)
TS-2	30	30	2.2	8000	500	0.3	3/8	1/2
TS-3H	30	30	5.4	8000	500	0.4	3/8	1/2


Needle scalars Specifications; Air pressure 6kg/cm²

MODEL	Piston Dia (mm)	Blow per Min (bpm)	Need Dia Length, Number (mm)x(mm)xpiece	Piston Stroke (mm)	Net Weight (kg)	Overall Length (mm)	Air Cons. Free (m ³ /min)	Air Inlet (PT)	Hose Size (in)
N-200	20	12000	3×125×12	12	1.12	225	0.25	1/4	1/4
TNS-200	20	4000	3×180×12	25	2.4	345	0.25	1/4	3/8
TNS-200PS	20	3500	3×180×12	25	1.6	305	0.25	1/4	3/8
TN-300H	25.3	4500	3×180×19	39	4.3	571	0.5	3/8	12.7(mm)

Hammers




- Features**
- Compact, light handy and durable
 - Spool valve for precise speed control
 - Built-in air regulator controls power output

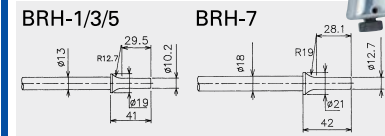

BRH-1/3/5/7



- Features**
- Heavy duty air hammer for general use
 - Simple structure and durable
 - Ideal for muffler and pipe removal, body shop work



MH-5111R/5115

Flux chippers



TFC-200




TFC-200F



TFC-257K-1300



TFC-300H

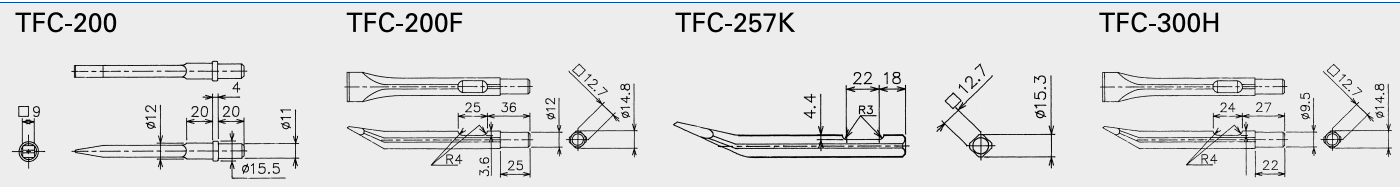

Hammers Specifications; Air pressure 6kg/cm²

MODEL	Piston Dia (mm)	Chisel Shank Bore Size (mm)	Blow per Min (bpm)	Piston Stroke (mm)	Net Weight (kg)	Overall Length (mm)	Air Cons.Free (m ³ /min)	Air Inlet (PT)	Hose Size (in)
BRH-1	14.3	10	3700	52	1.3	170	0.32	1/4	1/4
BRH-3	14.3	10	1800	76	1.4	200	0.32	1/4	1/4
BRH-5	14.3	10	1700	101	1.5	222.5	0.32	1/4	1/4
BRH-7	19	12	1500	90	2.1	220	0.35	1/4	1/4
MH-5111R	19	10	3500	66	1.6	200	0.2	1/4	1/4
MH-5115	19	10	2100	90	2	250	0.4	1/4	1/4

Flux chippers Specifications; Air pressure 6kg/cm²

MODEL	Piston Dia (mm)	Blow per Min (bpm)	Piston Stroke (mm)	Net Weight (kg)	Overall Length (mm)	Air Cons. Free (m ³ /min)	Air Inlet (PT)	Hose Size (in)
TFC-257L	25.4	3000	34	1.7	240	0.4	3/8	1/2
TFC-200	20	12000	12	0.89	182	0.25	1/4	1/4
TFC-200F	20	12000	12	1.06	187	0.25	1/4	1/4
TFC-257K-1300	25.4	3000	34	5	1300	0.4	3/8	1/2
TFC-300H	25.3	4500	39	4.3	571	0.5	3/8	12.7(mm)

Sanders

Features

- 5mm orbit for high quality finishing
- Compact and light weight providing best power to weight ratio in this class



**MS-430
N-5/N-6**

Features

- Ideal for removing rust and sanding metal



MOS-343

Features

- Easy handle, compact and lightweight
- Built-in power regulator
- Ideal for light sanding



MS-4125B



**MS-430
G-5/G-6**

Features

- Ideal for smoothing automotive surfaces




MOS-443

Features


- Heavy duty motor handles tough operations
- Light weight
- Ball bearing construction for long life




**MS-4245B
(MS-4247B)**



5"pad type



6"pad 6Holes type



6"pad 8Holes type

Sander Specifications: Air pressure 6kg/cm²

MODEL	Paper Size or Disk Size (mm)	Pad Type	Free Speed (rpm)	Orbit Size (mm)	Net Weight (kg)	Air Cons. Free (m ³ /min)	Air Inlet (PT)	Hose Size (in)
MS-430N-5	125	VELCRO	10000	5	0.9	0.38	1/4	3/8
MS-430N-6	150	VELCRO	10000	5	0.9	0.38	1/4	3/8
MS-430G-5	125	VELCRO	8500	5	0.93	0.38	1/4	3/8
MS-430G-6	150	VELCRO	8500	5	0.93	0.38	1/4	3/8
MOS-343	75×110	VELCRO	8500	3	0.68	0.38	1/4	3/8
MOS-443	100×110	VELCRO	8500	3	0.68	0.38	1/4	3/8
MS-4125B	75 · 115	-	14000	-	1	0.38	1/4	3/8
MS-4245B	178	VELCRO	5000	-	2.95	0.6	1/4	3/8
MS-4247B	178	VELCRO	2500	-	2.95	0.6	1/4	3/8

OPERATING INSTRUCTIONS WHEN USING GENERAL AIR TOOLS

1. ALWAYS USE APPROVED EYE PROTECTION WHEN OPERATING TOOL.
2. NEVER WEAR LOOSE GLOVES OR CLOTHES WHEN OPERATING TOOL.
3. ALWAYS CHECK IF THE TOOL IS GOING TO BE USED WITH ACCESSORIES IN CORRECT SIZE AND IN GOOD CONDITION BEFORE ACTUAL OPERATION. (IMPACT SOCKETS, COUPLERS, DRILL BITS, BURS, CUTTER, DISCS, BRUSHES, NEEDLES, CHISELS, PISTONS AND OTHER ACCESSORIES FOR AIR TOOLS)
4. ALWAYS CHECK IF THE TOOL IS BEING LUBRICATED SUFFICIENTLY, BEFORE ACTUAL OPERATION. CHECK YOUR INSTRUCTION MANUAL ENCLOSED IN THE TOOL FOR CORRECT METHOD OF LUBRICATION. IN CASE IF THE OPERATION MANUAL WAS NOT ENCLOSED IN THE TOOL WHEN PURCHASED, STOP USING THE TOOL, CONTACT YOUR NEAREST DEALER AND ASK FOR THEIR INSTRUCTION.
5. ALWAYS USE THE CORRECT AIR PRESSURE AMOUNT INSTRUCTED IN THE OPERATION MANUAL ENCLOSED IN THE TOOL, IN CASE IF THE OPERATION MANUAL WAS NOT ENCLOSED IN THE TOOL WHEN PURCHASED, STOP USING THE TOOL, CONTACT YOUR NEAREST DEALER AND ASK FOR THEIR INSTRUCTION.
6. ALWAYS DIRECT EXHAUST AWAY FROM YOURSELF AND OTHERS IN THE AREA.
7. ALWAYS DISCONNECT THE TOOL WHEN NOT IN USE.
8. IN CASE IF YOU FIND ANY MALFUNCTION OF THE TOOL, STOP USING THE TOOL AND CONTACT YOUR NEAREST DEALER.

Toku air tools torque calibration chart

Legend: N · m Kg · m

Tool Model	Working Torque Range	Max Torque	Tool Model	Working Torque Range	Max Torque
				(N · m)	(Kg · m)
MV-6216	(N · m)	3.9-8.8	MI-2000GL	(N · m)	343-637
	(kg · m)	0.4-0.9		(kg · m)	75
MV-6226	(N · m)	4.9-11.7	MI-2500P	(N · m)	490-1078
	(kg · m)	0.5-1.2		(kg · m)	130
MR-2207C	(N · m)	5.8-27.4	MI-2500GS	(N · m)	490-1078
	(kg · m)	0.6-2.8		(kg · m)	130
MR-2209C	(N · m)	5.8-27.4	MI-2500GL	(N · m)	490-1078
	(kg · m)	0.6-2.8		(kg · m)	130
MR-2310B	(N · m)	13.7-68.6	MI-3800P	(N · m)	490-1470
	(kg · m)	1.4-7.0		(kg · m)	200
MR-2410B	(N · m)	13.7-68.6	MI-3800GS	(N · m)	490-1470
	(kg · m)	1.4-7.0		(kg · m)	200
MI-12P	(N · m)	49-107	MI-3800GL	(N · m)	490-1470
	(kg · m)	5-11		(kg · m)	200
MI-16M(3/8)	(N · m)	49-147	MI-38GS	(N · m)	490-1078
	(kg · m)	5-15		(kg · m)	180
MI-1311B	(N · m)	29-68	MI-38GL	(N · m)	490-1078
	(kg · m)	3-7		(kg · m)	180
MI-1310S	(N · m)	9-88	MI-42GS	(N · m)	490-1765
	(kg · m)	1-9		(kg · m)	260
MI-16M(1/2)	(N · m)	147-245	MI-5000P	(N · m)	490-2157
	(kg · m)	15-25		(kg · m)	270
MI-17HE	(N · m)	245-441	MI-5000GS	(N · m)	490-2157
	(kg · m)	25-45		(kg · m)	270
MI-20P	(N · m)	392-784	MI-5000GL	(N · m)	490-2157
	(kg · m)	40-80		(kg · m)	270
MI-2000P	(N · m)	343-637	MI-5500	(N · m)	1470-4197
	(kg · m)	35-65		(kg · m)	560
MI-2000GS	(N · m)	343-637			
	(kg · m)	35-65			